

# AC12.8SET

Combination of AUDIOCONTROL12.8  
+ AC12.8FP



AC12.8SET is an AUDIOCONTROL12.8 with the AC12.8FP feature pack already built-in. The AUDIOCONTROL12.8 matrix controls much more than your audio! You can have different sound sources in different zones at various volume levels, do selective paging and on top of that control other devices as well. Briefly: your all in one audio and control center.


The Feature Pack expands the functionalities of the AUDIOCONTROL with message player/recorder, logical inputs & 0-10V inputs, logic outputs, output delay and zone combining.

For more information about this AUDIOCONTROL SET, please check the product pages or technical sheets of AUDIOCONTROL and Feature Pack.

## TECHNICAL SPECIFICATIONS

|                                   |                |                                    |                |
|-----------------------------------|----------------|------------------------------------|----------------|
| 19" (483 mm wide) rack mounting   | yes            | height- rack units (1U=44 mm) in U | 1              |
| depth (build in) in mm            | 308            | depth (incl front) in mm           | 313            |
| power supply                      | 115 - 230 VAC  | power consumption (max) in watts   | 75             |
| zone outputs                      | 8 configurable | output level balanced (dB)         | 0              |
| output level unbalanced (dB)      | 5              | S/PDIF output                      | yes            |
| signal to noise level SNR (dB)    | >100           | total harmonic distortion TBH (%)  | <0.005         |
| crosstalk (dB)                    | >95            | music level control                | yes            |
| MIC level control                 | yes            | VCA level control                  | Yes            |
| source selection per zone         | yes            | MIC inputs balanced                | 6              |
| MIC inputs unbalanced             | 6              | inputs with Phantom power          | 6              |
| Phantom power voltage in volts    | 24             | noise gate on MIC                  | yes            |
| selectable input dynamics         | yes            | selectable output dynamics         | yes            |
| line input balanced               | 6 configurable | line input unbalanced              | 6 configurable |
| S/PDIF input                      | 1 stereo       | tone control                       | yes            |
| RS232 (serial communication port) | yes            | wall panel controls                | yes            |
| priority input contact            | no             | maximum qty paging Mics            | 120            |
| chime                             | yes            | emergency input                    | yes            |
| priority output contact           | yes            | priority levels                    | configurable   |
| frequency response (in Hz)        | 20 - 30 k      | applicable in 100V                 | yes            |
| applicable low impedance          | yes            | Net weight product (kg)            | 3.90           |

MORE PICTURES

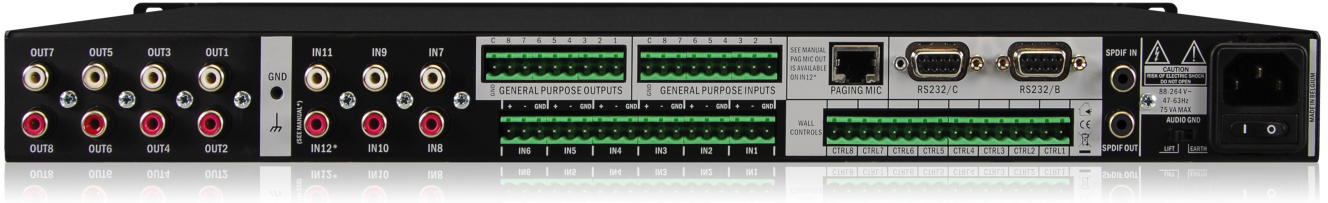

## ACCESSORIES



### DIPEX

Digital Priority/Emergency Extender for AUDIOCONTROL12.8