

## IC5

### CEILING LOUDSPEAKERS

*In-ceiling / In-wall Loudspeaker*



### PRODUCT OVERVIEW

With its discreet design, the IC5 2-way loudspeaker is the perfect option for 70/100 V and low impedance sound solutions. It mounts a 5" woofer and a 0,5" tweeter.

IC series provide excellent sound quality thanks to their infinite baffle philosophy and a top-performance high frequency transducer.

### KEY FEATURES

- Two-way ABS speaker, 25 WRMS
- 5" woofer / 0,5" tweeter
- Built-in audio transformer for 70/100 V use
- Polypropylene woofer that resists heat and humidity
- Front grill may be removed for painting
- Aluminium front grill, rust-proof
- Clip-type input terminals and low impedance / high impedance power tap selector
- Cutting and painting templates included
- Support system with 3 rotating tabs


### APPLICATIONS

- Corporate and residential buildings
- Commercial premises
- Leisure centres
- Sound reinforcement in clubs, bars, etc.
- Health and sports centres
- Meeting and conference rooms
- 5.1 and 7.1 surround systems
- Auditoriums, museums

### CERTIFICATIONS

- EN60065:2014
- EN55103-1:2009
- EN55103-2:2009
- 2006/95/EC
- 2004/108/CE

## MECHANICAL DIAGRAMS

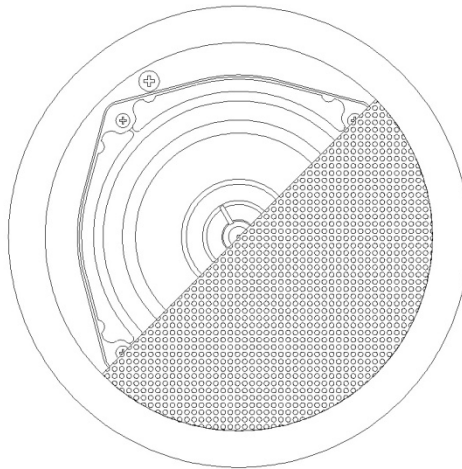

## TECHNICAL DATA

<b>Nominal low impedance</b>	8Ω
<b>RMS power</b>	25W
<b>Nominal high impedance</b>	100V Line
<b>Power selector</b>	1.5, 3, 6, 12W
<b>Frequency response (-6dB)</b>	80Hz - 20kHz
<b>Sensitivity 1W/1m</b>	88dB
<b>External diameter</b>	191mm
<b>Internal diameter</b>	166mm
<b>Recommended cut out diameter</b>	168mm
<b>Required depth</b>	70mm
<b>Weight</b>	1,2Kg